

INSTALLATION INSTRUCTION

Model: VT-8033
LED Dome Light




INTRODUCTION

Thank you for selecting and buying V-TAC LED Dome light. V-TAC will serve you the best. Please read these instructions carefully before starting the installation and keep this manual handy for future reference. If you have any other query, please contact our dealer or local vendor from whom you have purchased the product. They are trained and ready to serve you at the best.

TECHNICAL PARAMETERS

Performace parameter	Lamp	warm white	natural white	cool white
	Lumens (lm)	1100 lm	1200 lm	1250 lm
	color temperature (K)	3000K	4000K	6400K
	CRI	≥80		
	Type of LED	SMD2835 LED		
	Beam angle	110°		
	Decay rate (%)	less than 3% within 1000 working hours		
	Total power (W)	35W		
	Lifespan (Hrs)	≥30000Hrs		
	High voltage testing	500Vac/1min		
LED parameter	Lighting efficiency	100LM/W		
	Chip quantity	96PCS		
	Series-parallel way	16S6B		
	Voltage	50 - 52V DC		
	Current	280mA		
Driver specification	Input parameter	110~240Vac, 50/60Hz		
	Power factor	0.9		
	Output parameter	50-52V DC, 850mA		
Structure parameter	Material	PC		
	Dimension	φ 200 x 50mm		
	Cut - out	/		
	Protection class	calss I		
	IP	IP44		
Environment parameter	Application	hotel, home-lighting, recreation place, supermarket office building		
	Operating temperature	-25°C ~ 50°C, 10% - 90% R.H.		
	Storage temperature	-30°C ~ 85°C, 0% - 95% R.H.		
Packing specification	Qty / Ctn	carton size	N.W	G.W
	8PCs / Ctn			


STRUCTURE & SIZE

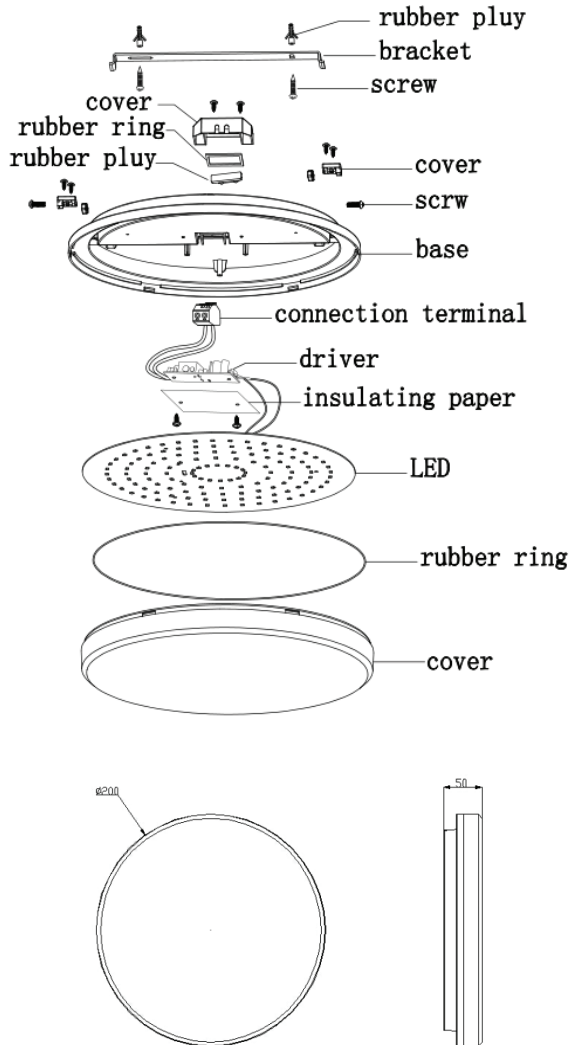



INSTALLATION INSTRUCTION

1. Switch off the power.
2. To drill the appropriate holes, then put the particles and fix the bracket on the wall by screw. (picture 1)
3. Connect the the electricity 100-240V. (picture 2)
4. Install the light on the ceiling. (picture 3)
5. Switch on the power if above steps are done properly without any mistakes.

1



2



3

